

# European Tall Wine Tower

## EI24WC75H S



Shown with Display Shelf



### 160-Bottle Capacity\*

Remarkable storage capacity accommodates up to 160 bottles\* of wine under perfect storing and serving conditions. Flexible shelving options for arranging and displaying wine collections.



### Perfect Set™ Temperature Controls

Digital temperature controls provide superior wine storage by monitoring and maintaining stable temperatures between 45° and 65° F.



### Tinted Window with UV Protection

Tinted window permits viewing and displaying of wine collection without opening the door. UV-protective coating blocks out harmful ultraviolet light, preventing premature aging of wine.



### Optional Wooden Storage Drawer

Ideal for chilling liquors or storing wine accessories. (Shown with optional bulk storage shelf.)

### 24" EUROPEAN TALL WINE TOWER

Capacity	15.0 Cu. Ft.
Maximum Storage	160 Bottles*
Installation Type	Built In/Freestanding

#### Features

IQ-Touch™ Electronic Controls	Yes
Fully Integrated Control Panel	Yes
Blue LED Display	Yes
Luxury-Design™ LED Lighting	Yes
Exhibit Lighting with Manual Control	Yes
Luxury-Glide™ Full-Extension Shelves	13
Display Shelf	Yes
Luxury-Design™ Lighting	Yes
Perfect Set™ Controls	Yes
PureAdvantage® Air Filtration	Yes
Electronic Control Lock	Yes
Display Temp Mode (°C or °F)	Yes
Door Ajar Acoustic Alarm	Yes
High-Temperature Acoustic Alarm	Yes
Power Failure Acoustic Alarm	Yes
Mute Sound Control	Yes
Power-On/Off Control	Yes
Vacation Mode	Yes
Sabbath Mode (Star-K® Certified)	Yes
Frost-Free Performance	Yes
Quiet Operation	Yes
Low-Vibration Operation	Yes

#### Additional Features

Soft-Arc Door and Handle Design	Yes
UV-Protective, Tinted Glass Window	Yes

#### Accessories

Trim Kit – PN# 5304469470	Optional
Wooden Storage Drawer – PN# 5304470689	Optional
Bulk Storage Shelf – PN# 5304469472	Optional
Luxury-Glide™ Full-Depth Shelving Kit (2 Shelves) – PN# 5304469473	Optional
Luxury-Glide™ Half-Depth Shelving Kit (2 Shelves) – PN# 5304469474	Optional
PureAdvantage® Replacement Air Filter – PN# EAFCBF	Included



#### Specifications

Color –	Stainless Steel	S
Overall Exterior Dimensions –		
Height (Adjustable)	75" – 76"	
Width	23-1/2"	
Depth (to Center of Arc) (with 90° Door Open)	27-1/2" 49"	
Temperature Range	45°F - 65°F	
Power Supply Connection Location	Right Bottom Rear	
Voltage Rating	120V/60Hz/15A	
Connected Load (kW Rating) @ 120 Volts†	.15	
Minimum Circuit Required (Amps)	15	
Shipping Weight (Approx.)	315 Lbs.	

\*Based on standard 750 ml bottles and fully shelved configuration.

†For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

NOTE: Always consult local and/or national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at [electroluxappliances.com](http://electroluxappliances.com). Specifications subject to change.

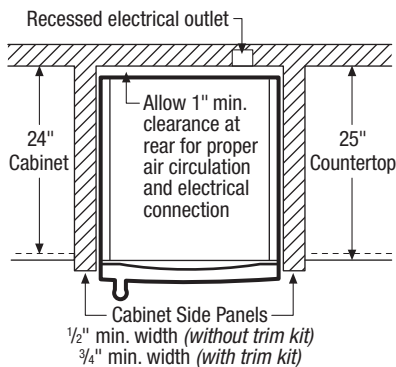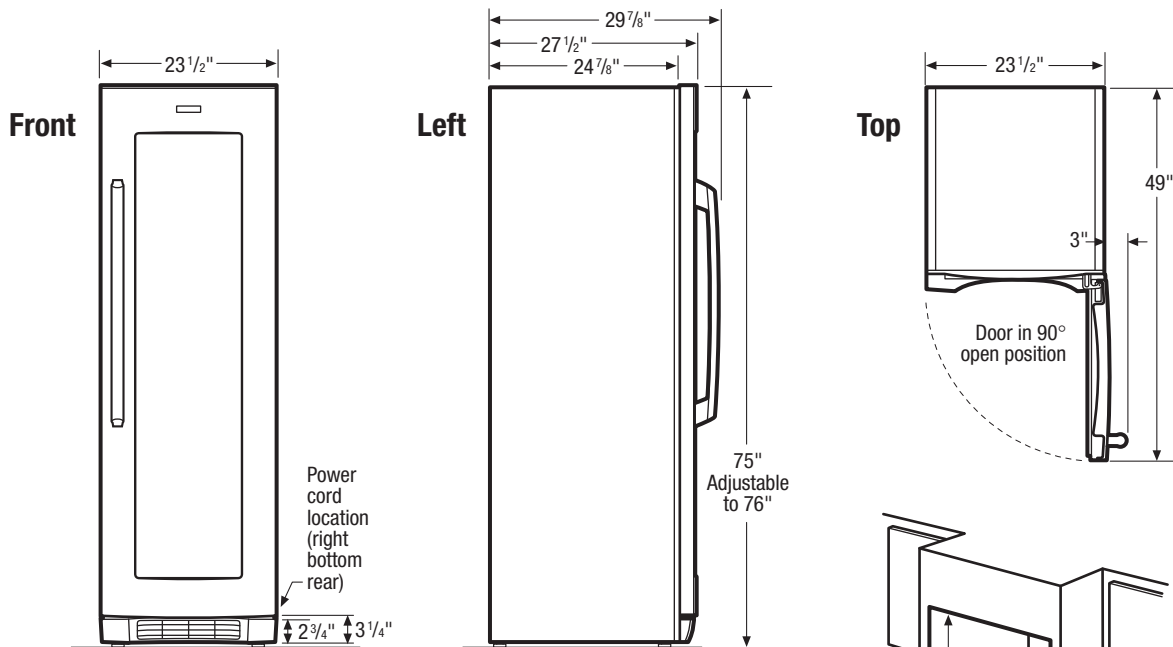


### Built-In Cutout Dimensions

Without Trim Kit	With Trim Kit*
(A) 75 1/2" min.	(A) 75 7/8"
(B) 24 1/8" min.	(B) 25 1/2"
(C) 27" min.**	(C) 28" min.**

\*Optional Trim Kit (PN# 5304469470) includes side/top trim pieces, corner brackets and screws. (Refer to detailed installation instructions included with kit or on web.)

\*\*Minimum depth from face of cabinet side panels

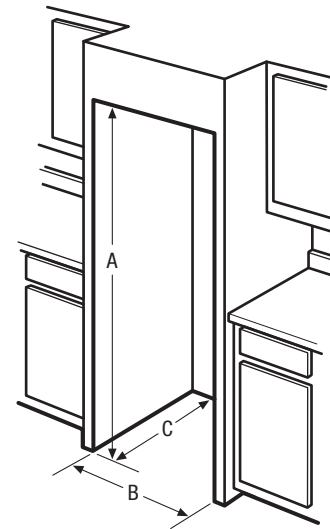

### 24" European Tall Wine Tower Specifications

- Product Weight (Approx.) – 265 Lbs.
- Voltage Rating – 120V/60Hz/15 Amps
- Connected Load (kW Rating) @ 120 Volts = 0.15kW (For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.)
- Amps @ 120 Volts = 6 Amps
- Electrical cable supplied.
- Always consult local and/or national electric codes.
- Unit is designed for either freestanding or built-in installation.
- For built-in installation, minimum opening of 75-1/2" H (from top of flooring) x 24-1/8" W x 27" D required to allow for ease of installation, proper air circulation, and electrical connection.
- Remove all wall/floor molding prior to built-in installation.
- Floor should be level surface of hard material, capable of supporting fully loaded unit.
- When installing against cabinet or wall that extends beyond front edge of unit, 3" minimum handle clearance required to allow for 90° door swing, providing sliding shelves with necessary clearance.
- To ensure optimum performance and maintain proper temperatures inside unit, do not install in areas where temperature drops below 55°F or rises above 110°F and avoid installing in direct sunlight or close proximity to any heat source.

- For proper ventilation, front grille MUST remain unobstructed.
- Adjustable front rollers and leveling legs assist with ease of installation and door alignment.

### Trim Kit (5304469470) Installation Specifications

- To use Trim Kit (PN# 5304469470), an enclosure is required around Wine Tower having an opening of 75-7/8" H (from top of flooring) x 25-1/2" W with minimum cabinet side panels of 28" D x 3/4" W.
- Cabinet or soffit above unit must extend out to same depth as side panels.
- Minimum 7' x 7' clear floor space required for Trim Kit assembly.
- For detailed installation, refer to instructions included with kit or on web.

Note: Refer to Product Installation Guide for detailed instructions on the web at [electroluxappliances.com](http://electroluxappliances.com).

### Optional Accessories

- Trim Kit – (PN# 5304469470).
- Wooden Storage Drawer – (PN# 5304470689).
- Bulk Storage Shelf – (PN# 5304469472).
- Luxury-Glide™ Full-Depth Shelving Kit (2 Shelves) – (PN# 5304469473).
- Luxury-Glide™ Half-Depth Shelving Kit (2 Shelves) – (PN# 5304469474).